

Continental™ 1100 Litre Towing

Technical information




Product Image & Key Features

- Double skinned UV resistant rotary-moulded lid with optional lid lock
- Comb lifting bar (frontal receiver) to EN 840-2
- Facility for ID chip in frontal receiver to EN 14803
- Draw-depth and shape of pressings optimised to avoid buckling/distortion of bin on impact or lifting when laden.
- Sump base for improved rigidity and stability with drain plug as standard
- Reinforced steel base plate designed for the demands of towing
- Robust steel hinge bar secured by split-pin
- Optional DIN point lifting trunnions
- Handles designed to EN 840 for ergonomic handling and safety keeping hands away from lifting gear
- Large area for vinyl graphics
- Fully internally welded seams
- Special directional towing castors manufactured to Taylor's specification
- Towing hitch and eye kit

Technical Drawing

Empty Weight
107KG

Safe Working Load
440KG

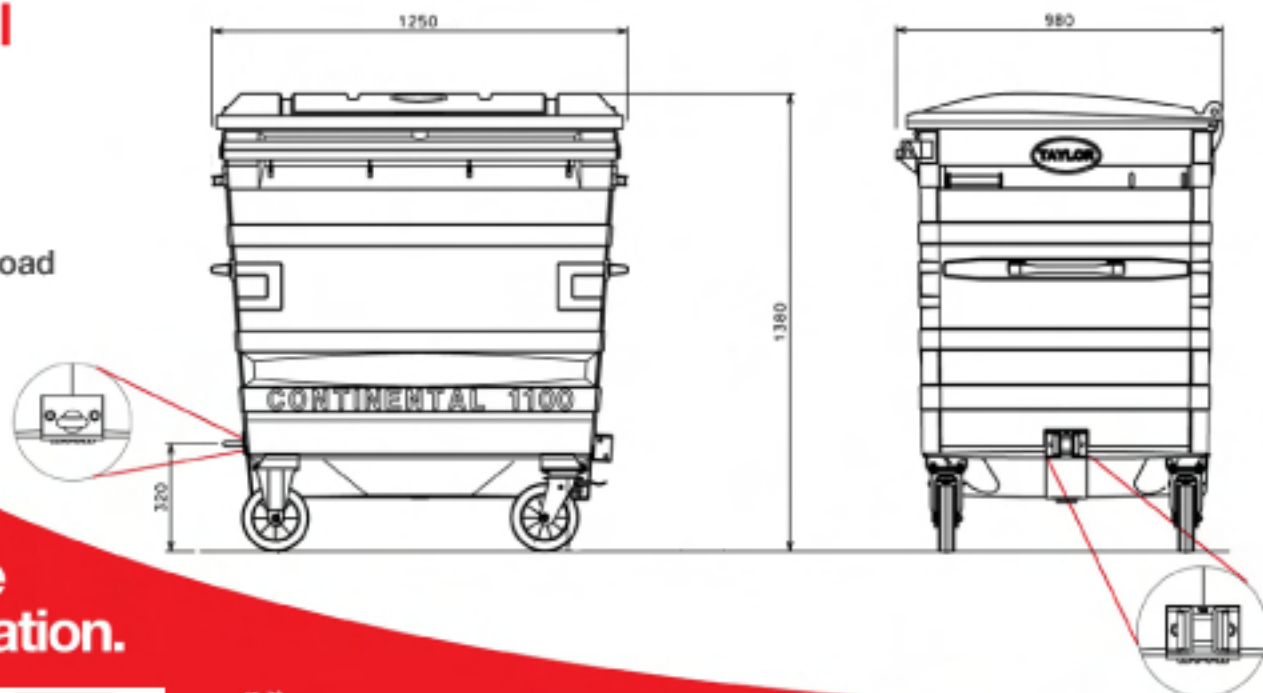

the name
for innovation.



INVESTOR IN PEOPLE

talk to us
01299 251 333

e-mail us
custserv@taylorbins.co.uk

online
www.taylorbins.co.uk

All dimensions are shown in mm and are for information purposes only.

Taylor, Continental, Chamberlain, nodes, Taylor Street are trademarks. Taylor record, register and enforce their intellectual property rights. Taylor maintains a policy of continuous research and development, specifications are subject to alteration without notice.

Issued October 2010